
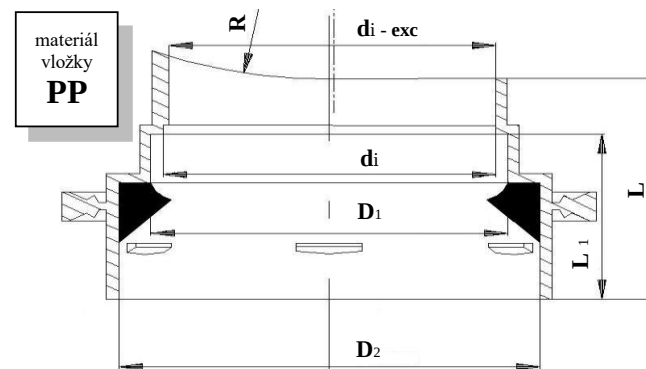


šachtová vložka pro:

GGG - litinové trouby

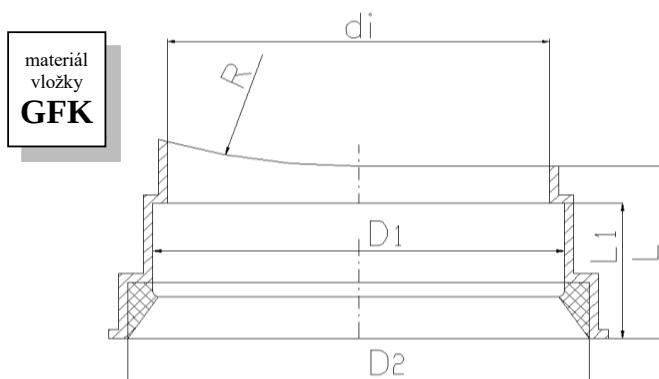

přípojná trouba						šachtová vložka							těsnění	
DN	vnější průměr (mm)			vnitřní průměr (mm)			D ₂	D ₁	d _i [*]	L ₁ min.	L min.	R _{standard}	materiál vložky PP/GFK	profil těsnění (mm)
150	170	+1,0	-2,9	150	+9,0	-10,0	200,0 +/- 2,0	173,0 +/- 1,5	150,0 +/- 2,0	95	100	rovná / 500	PP	21
200	222	+1,0	-3,0	200	+10,8	-10,0	252,0 +/- 2,0	225,0 +/- 1,5	206,5 +/- 2,0	95	100	rovná / 500	PP	21
250	274	+1,0	-3,1	250	+12,6	-10,0	290,0 +/- 2,0	276,5 +/- 1,5	256,0 +/- 2,0	85	90	rovná / 500	GFK	16
300	326	+1,0	-3,3	300	+14,0	-10,0	350,0 +/- 2,0	326,5 +/- 1,5	312,0 +/- 2,0	100	105	rovná / 500	GFK	20
400	429	+1,0	-3,5	400	+14,8	-10,0	457,0 +/- 2,0	430,0 +/- 1,5	405,0 +/- 2,0	90	95	rovná / 500	GFK	20
500	532	+1,0	-3,8	500	+16,6	-10,0	558,0 +/- 2,0	533,0 +/- 1,5	503,0 +/- 2,0	90	95	rovná / 500	GFK	20
600	635	+1,0	-4,0	600	+18,4	-10,0	662,0 +/- 2,5	637,5 +/- 2,5	613,0 +/- 2,5	120	125	rovná / 500	GFK	20
700	738	+1,0	-4,3	700	+16,8	-10,0	770,5 +/- 2,5	742,5 +/- 2,5	702,5 +/- 2,5	95	100	rovná	GFK	22
800	842	+1,0	-4,5	800	+19,4	-10,0	874,5 +/- 2,5	845,5 +/- 2,5	795,5 +/- 2,5	95	100	rovná	GFK	22
900	945	+1,0	-4,8	900	+21,0	-10,0	976,0 +/- 3,0	948,0 +/- 3	893,0 +/- 3,0	100	105	rovná	GFK	22
1 000	1048	+1,0	-5,0	1000	+22,6	-10,0	1 080,0 +/- 3,0	1 052,0 +/- 3	999,0 +/- 3,0	100	105	rovná	GFK	22

norma potrubí: **ČSN EN DIN 598** (litina)

konstrukce potrubí: **hladká trouba**

materiál vložek: **vložky jsou vyrobeny z polypropylenu nebo z laminátu**