
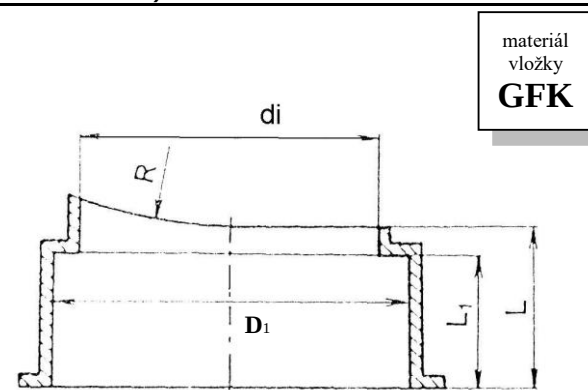


šachtová vložka pro:

VBR + VBR II (ROBUKAN SMR)

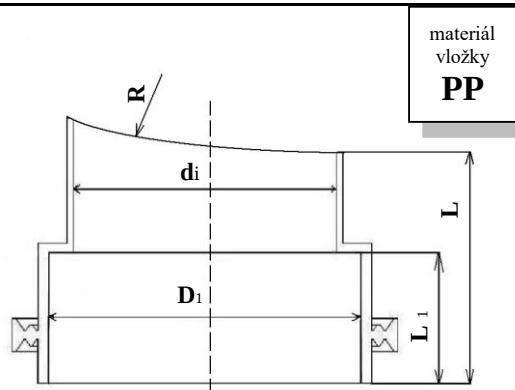

VBR										
přípojná trouba			šachtová vložka							těsnění
DN	vnější průměr (mm)	vnitřní průměr (mm)	D ₂	D ₁	d _i	L ₁ min.	L min.	R _{standard}	materiál vložky PP/GFK	profil těsnění (mm)
150	174	147	x	175,5 +/- 1,0	150,0 +/- 1,0	78	88	rovná / 500	PP	x
200	235	201	x	237,0 +/- 1,0	200,5 +/- 1,0	78	88	rovná / 500	PP	x
VBR II - (SN8)										
150	174	147	x	175,5 +/- 1,0	151,0 +/- 1,0	90	95	rovná / 500	GFK	x
200	235	201	x	238,0 +/- 1,0	201,0 +/- 1,0	90	95	rovná / 500	GFK	x
250	293	250	x	296,0 +/- 1,5	252,0 +/- 1,5	90	95	rovná / 500	GFK	x
300	346	294	x	349,5 +/- 1,5	301,0 +/- 1,5	100	105	rovná / 500	GFK	x
350	399	344	x	402,5 +/- 1,5	352,0 +/- 1,5	110	120	rovná / 500	GFK	x
400	461	399	x	466,5 +/- 2,0	402,0 +/- 2,0	110	115	rovná / 500	GFK	x
VBR II - (SN16)										
500	587	498	x	575,5 +/- 2,0	502,0 +/- 2,0	130	135	rovná / 500	GFK	x
600	694	595	x	691,0 +/- 2,0	602,0 +/- 2,0	145	150	rovná / 500	GFK	x
norma potrubí: EN DIN 13476 (PP)										
konstrukce potrubí: korugovaná , těsnění na troubě										
materiál vložek: vložky jsou vyrobeny z polypropylenu nebo z laminátu										