


šachtová vložka pro:

BETON / ŽELEZOBETON - BENTEX BLR

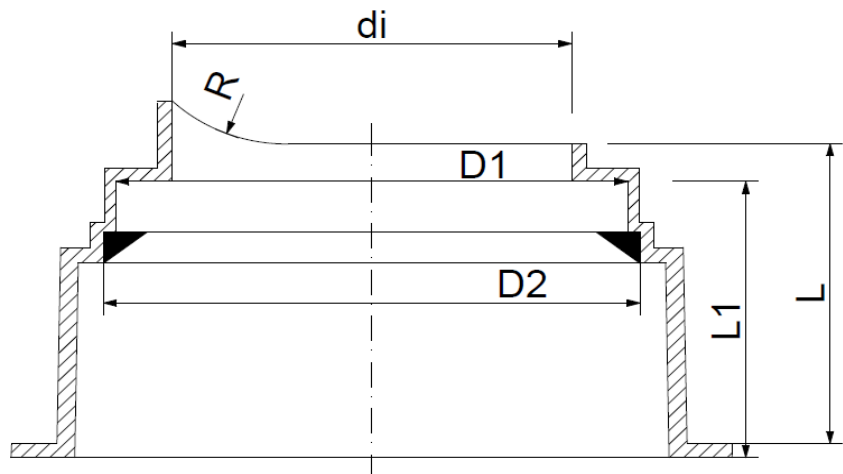

přípojná trouba				šachtová vložka								těsnění					
DN	vnější průměr (mm)			vnitřní průměr (mm)			D ₂	D ₁	d _i	L ₁ min.	L min.	R _{standard}	materiál vložky PP/GFK	profil těsnění (mm)			
250	350,0	+1,2	-0,7	250,0	+3,0	-3,0	378,0	- 3,0	364,0	- 3,0	253,0	- 3,0	85	110	rovná	GFK	18
300	404,0	+1,2	-0,7	300,0	+3,0	-3,0	431,6	- 3,0	417,6	- 3,0	303,0	- 3,0	85	110	rovná	PP/GFK	18
400	505,3	+1,4	-0,9	400,0	+4,0	-4,0	533,0	- 3,0	519,0	- 3,0	403,0	- 3,0	90	110	rovná	GFK	18
500	610,0	+1,4	-0,9	500,0	+4,0	-4,0	638,0	- 4,0	624,0	- 4,0	503,0	- 4,0	90	110	rovná	GFK	18
600	726,0	+1,4	-0,9	600,0	+5,0	-5,0	754,0	- 4,0	740,0	- 4,0	603,0	- 4,0	90	110	rovná	GFK	18
700	844,0	+1,4	-1,0	700,0	+6,0	-6,0	876,4	- 4,0	860,4	- 4,0	703,0	- 4,0	105	120	rovná	GFK	22
800	962,0	+1,4	-1,0	800,0	+6,0	-6,0	994,6	- 4,0	978,6	- 4,0	803,0	- 4,0	105	120	rovná	GFK	22
900	1 080,0	+1,4	-1,0	900,0	+7,0	-7,0	1 112,8	- 5,0	1 096,8	- 5,0	903,0	- 5,0	105	120	rovná	GFK	22
1000	1 198,0	+1,4	-1,0	1 000,0	+7,0	-7,0	1 231,0	- 5,0	1 215,0	- 5,0	1 003,0	- 5,0	105	120	rovná	GFK	22

norma potrubí: **EN DIN 1916** (BETON nebo ŽELEZOBETON)

konstrukce potrubí: **železobetonová hladká trouba**

materiál vložek: **vložky jsou vyrobeny z polypropylenu nebo z laminátu**